CASTER INSTALLATION

Before assembly takes place, be sure that all necessary tools and hardware have been collected and identified.

Hardware Included
(Number of casters depends upon the size and type of unit)
Caster (one per post)
3/4" Caster screw (four per caster)

Tools Required
Phillips screwdriver
Tape Measure

INSTRUCTIONS

Remove all items from your unit including the liners. Lay the unit on a flat surface using a mat, blanket, or cardboard to prevent the unit from scratches. Remove the casters you are replacing. Align the new caster so the base plate is 2" from the side panels. This will allow the casters to spin freely.

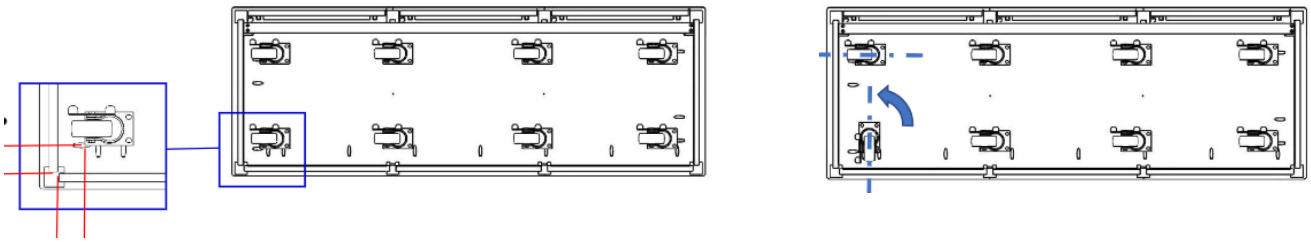

You may predrill if desired using an Ø1/8" drill bit if you are screwing in by hand. If using a power driver, it is unnecessary to predrill the holes.
Note: if you predrill mark the end of the drill bit 1/2" from the tip with a piece of tape to use as a stopping point to prevent from drilling through the bottom panel.

Fasten the caster to the bottom panel using the supplied 3/4" screws, four screws per caster.

Repeat for the other casters.
Installation is complete.

QUESTIONS ABOUT YOUR PRODUCT?
Contact our Customer Support Team: 1 (800) 505-7926
Monday-Friday, 8:00 AM - 5:00 PM CST

©2024 The Prestwick Group, Inc. All Rights Reserved.