HEADER BOARD INSTALLATION

Before assembly takes place, be sure that all necessary tools & hardware have been collected and identified.

-Phillips screwdriver

INSTRUCTIONS

1. Looking at the back of the unit, locate and remove all header bolts using your fingers or a phillips screwdriver. (sample model shown)

2. Place the header board in position on the back of the unit. Header will rest on the top of the back posts. Secure with the header bolts that were removed in the previous step. If needed, have someone help hold the header board in place while you install the header board bolts. Start with the outer bolts first and work your way inward to help keep your header board straight.

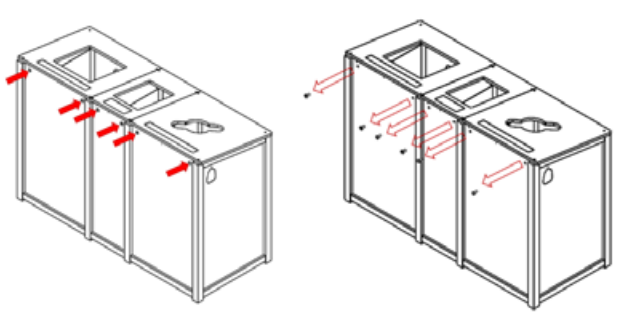

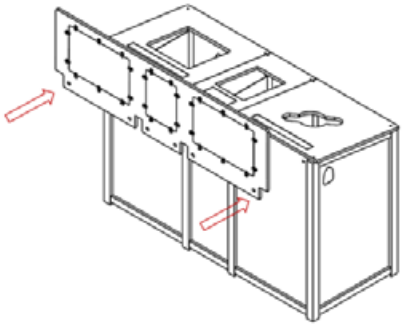

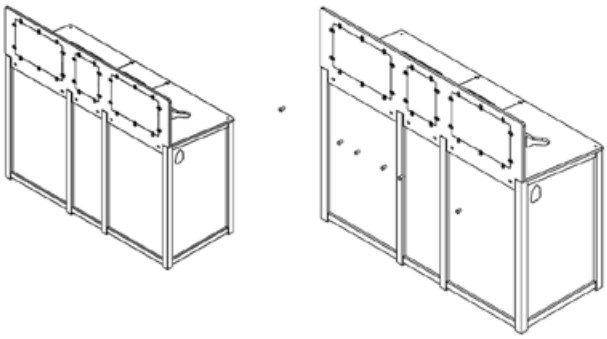

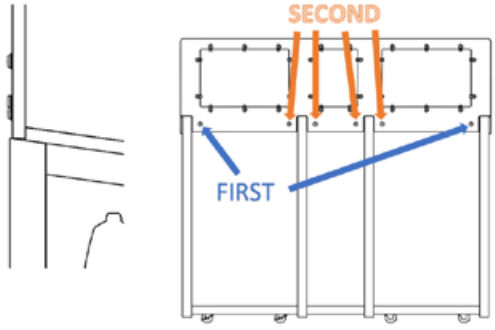

QUESTIONS ABOUT YOUR PRODUCT?
Contact our Customer Support Team: 1 (800) 505-7926
Monday-Friday, 8:00 AM - 5:00 PM CST

©2024 The Prestwick Group, Inc. All Rights Reserved.