The Prestwick Companies

LEVELING YOUR PRODUCTS

Thank you for choosing Prestwick.

Leveling your waste/recycling bin prevents rocking and also corrects hinged doors that sag when placed on an uneven surface. Since conventional concrete isn't perfectly flat, our levelers will easily accommodate for any gradual changes in height.

To adjust the levelers, we recommend using a 1" fixed, open-ended wrench (≈26mm) or an adjustable wrench.
Work gloves may also prove useful and will prevent hand injuries when leveling the bins upright.

INSTRUCTIONS

We stand behind our products and value your continued business.
Please follow these tips to ensure the longevity of your bins.

1. Place your bin(s) on a hard, flat surface. Observe any rocking.
2. Using your wrench, loosen levelers to lengthen them (clockwise with bin stood upright).
3. Test bin for rocking and test as necessary.

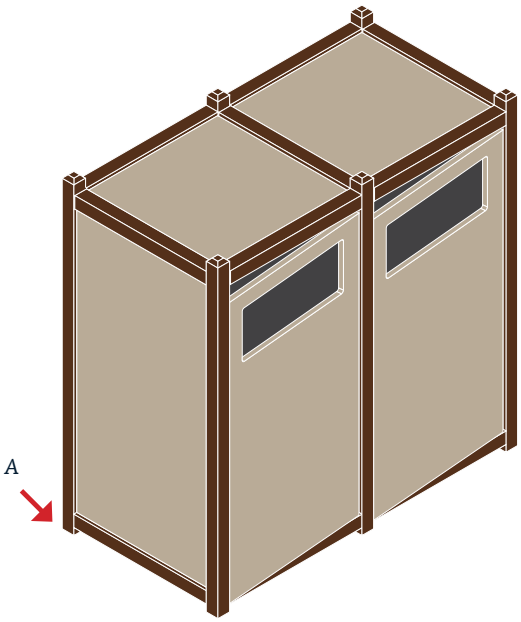

A. IF DOOR HANGS TO THE LEFT

Increase leveler height under the back left corner post of the product. This will help level the product and correct the door.

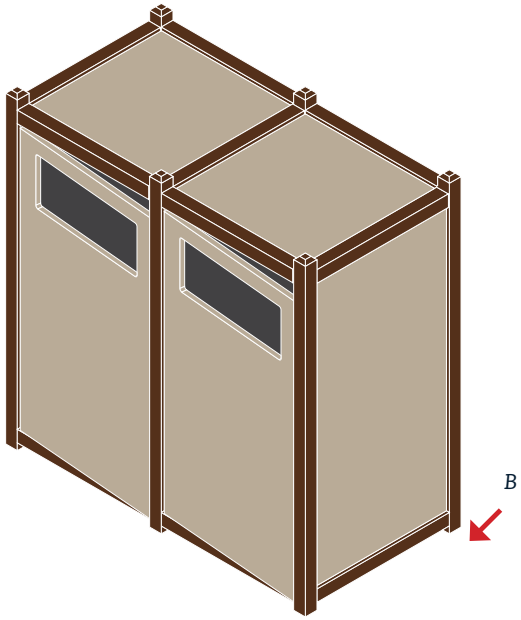

B. IF DOOR HANGS TO THE RIGHT

Increase leveler height under the back right corner post of the product. This will help level the product and correct the door.

QUESTIONS ABOUT YOUR PRODUCT?
Contact our Customer Support Team: 1 (800) 505-7926
Monday-Friday, 8:00 AM - 5:00 PM CST

©2024 The Prestwick Group, Inc. All Rights Reserved.